

Ken-Tec Products

Microspeak PIR Motion Sensor Message Announcer

MSA1




Features □

- ※ Small size, high-quality MP3 audio playback.
- ※ High and Low volume levels - switch selectable
- ※ Human body sensor to trigger message playback, sensing range of up to 4 m
- ※ 2 Mb internal flash memory
- ※ Multi message capability programmable for single message playback or sequential playback
- ※ 3 × AAA battery-powered, built-in 0.5-watt, 8 ohm speaker
- ※ 10-20 hours of continuous playback
- ※ Dimensions: 60mm*90mm*26.6mm
- ※ Weight: 62g

Application:

Door security reminder for the elderly, Customer personalized welcome, Mind the step, No smoking reminder, Wash your hands reminder, Health & Safety warning and reminders, Building site reminders, Wet paint reminders, Pull / push the door. etc

Function Instruction

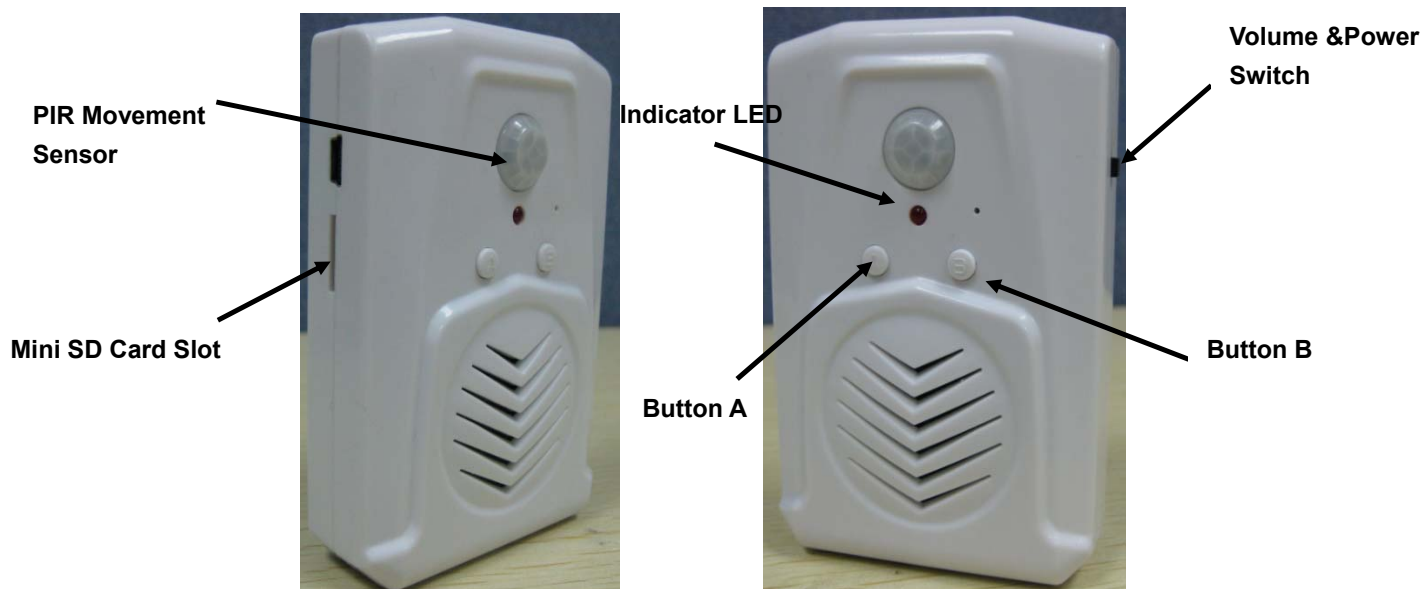

Item	Description	Function
Volume & Power Switch	Down	Turn Off Power Supply
	Middle	Low Volume
	Up	High Volume
Indicator LED	Off	Power off & No Movement detected
	On	Message playback
Button A	Short Press	Previous Message
	Long Press, LED Flashes	Mode Switch
Button B	Short Press	Next Message
	Long Press, LED Flashes	Reading message from SD card

Update Voice Files

Step1: Copy the files into root directory of Mini SD Card from computer

Step2: Plug the Mini SD card into Mini SD Card Slot

Step3: Power on and press and hold Button B until the LED flashes to indicate that files are being copied from the mini SD card into built-in Flash




***Note: The voice file size cannot exceed the capacity of the built-in Flash**

After file update, turn off power and remove Mini SD card. Power on and new message will play.

Mode Switch

Long press of Button A during message playback, until LED flashes will change the playback from single message to multiple messages to play in sequence (if multiple messages programmed) Long press again will revert to single message playback. Short press of button B during playback will change message to the next message stored on the built-in flash

Accessories

Item	Name	Num	Unit	Picture	Standard configuration
1	MSA1 Player	1	PCS		√
2	Mounting Bracket	1	Set		√
3	3A battery	3	PCS		Not Supplied

Ken-Tec Products
The Close
Yew Tree Lane
Bradley
Derbyshire DE6 1PG

Tel: 0870 7449968
Fax: 0870 7449969
Email: sales @ ktpuk.com
Web: www.ktpuk.com